



LA series

Application

- factory workshops
- cold storage
- sheltered outdoor areas
- car parks
- warehouse
- food industry, etc



TPL-5L45A Photometric



Model No.	Size (mm)	Wattage (w)	Efficacy (lm/W)	Lumen (lm)	Angle	PF>	CCT
TPL-2L18A	L600*W77*H30	18	120	2160	120°	0.9	3000K/4000K/6500K
TPL-4L36A	L1200*W77*H30	36	120	4320	120°	0.9	3000K/4000K/6500K
TPL-5L45A	L1500*W77*H30	45	120	5400	120°	0.9	3000K/4000K/6500K
TPL-2L12A-H	L600*W77*H30	12	200	2400	120°	0.9	3000K/4000K/6500K
TPL-4L24A-H	L1200*W77*H30	24	200	4800	120°	0.9	3000K/4000K/6500K
TPL-5L30A-H	L1500*W77*H30	30	200	6000	120°	0.9	3000K/4000K/6500K


*Lumen and Wattage: Type value with ±10% tolerance

OPTIONAL





LB series

SKD Modular design

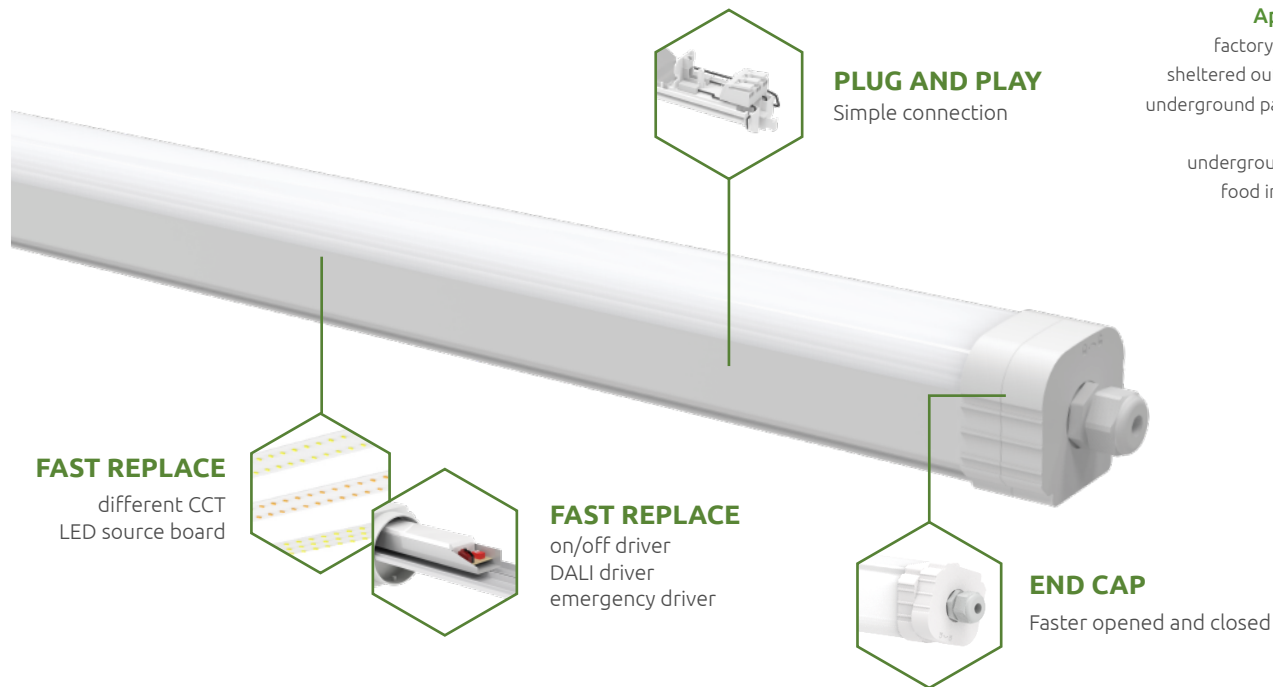

Application

- factory workshops
- sheltered outdoor areas
- underground passageways
- car parks
- underground stations
- food industry, etc



TPL-4L48B Photometric

Model No.	Size (mm)	Wattage (W)	Efficacy (lm/W)	Lumen (lm)	Angle	PF>	CCT
TPL-2L18B	L600*W74*H72	18	160	2880	120°	0.9	3000K/4000K/6500K
TPL-4L36B	L1200*W74*H72	36	160	5760	120°	0.9	3000K/4000K/6500K
TPL-5L48B	L1500*W74*H72	48	160	7680	120°	0.9	3000K/4000K/6500K


*Lumen and Wattage: Type value with ±10% tolerance

OPTIONAL



Different lens are available


a variety of optical lenses are available to adjust different applications, make the light more professional

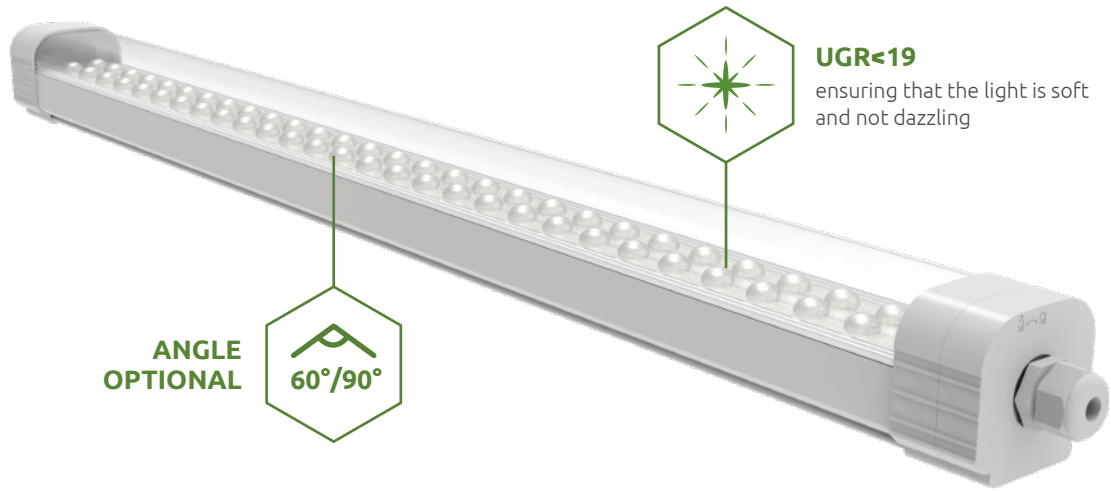


90° lens



60° lens



TPL-4L50B-P 60° Photometric



Model No.	Size (mm)	Wattage (w)	Efficacy (lm/w)	Lumen (lm)	Angle	PF>	CCT
TPL-2L25B-P	L580*W74*H72	25	180	4500	60°/90°	0.9	3000K/4000K/6500K
TPL-4L50B-P	L1080*W74*H72	50	180	9000	60°/90°	0.9	3000K/4000K/6500K
TPL-5L75B-P	L1580*W74*H72	75	180	13500	60°/90°	0.9	3000K/4000K/6500K

*Lumen and Wattage: Type value with ±10% tolerance

OPTIONAL



Dimmable



DALI



Emergency



Microwave induction



Wattage/CCT selectable


200lm/W

High efficiency

R series



Application
 metro station
 factory
 parking lot
 food industry
 chemical plants
 agriculture





Model No.	Size (mm)	Wattage (w)	Efficacy (lm/w)	Lumen (lm)	Angle	PF>	CCT
TPL-2R18-GT-φ45	L600*φ45	18	160	2880	120°	0.9	3000K/4000K/6500K
TPL-4R36-GT-φ45	L1200*φ45	36	160	5760	120°	0.9	3000K/4000K/6500K
TPL-5R48-GT-φ45	L1500*φ45	48	160	7680	120°	0.9	3000K/4000K/6500K
TPL-2R18-GT-φ70	L600*φ70	18	160	2880	120°	0.9	3000K/4000K/6500K
TPL-4R36-GT-φ70	L1200*φ70	36	160	5760	120°	0.9	3000K/4000K/6500K
TPL-5R48-GT-φ70	L1500*φ70	48	160	7680	120°	0.9	3000K/4000K/6500K

*Lumen and Wattage: Type value with ±10% tolerance

OPTIONAL



Double sided light, no flicker, low flare value, functional can be DIY by yourself to more suitable for different style of work places, creating attractive and inspiring atmosphere.

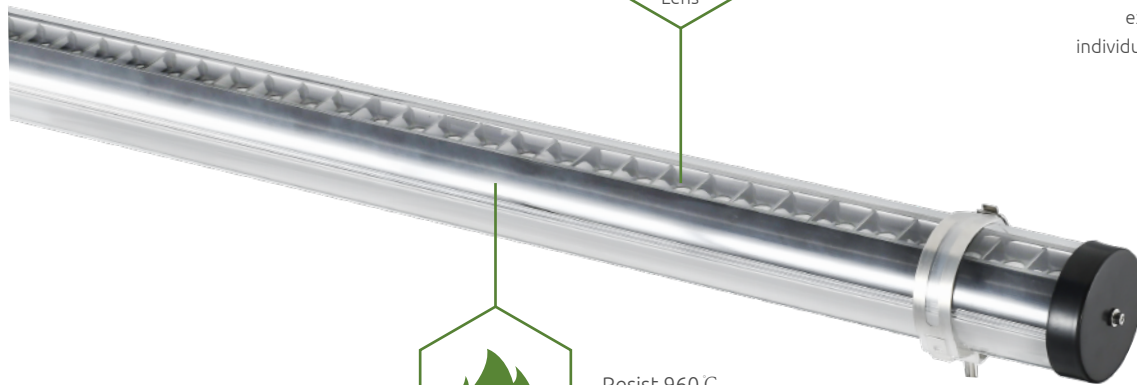

REPLACE



Different components can be replaced

Application

- the reception area
- meeting rooms
- break rooms
- corridors
- external facilities
- individual workstations



Resist 960 °C burning

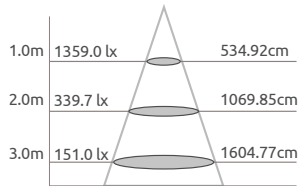


TPL-2R18-XTJ-φ70



SS316 mounting bracket for ceiling or suspending installation (standard configuration)





Suspend kit for suspending installation (sold separately)



Model No.	Size (mm)	Wattage (w)	Efficacy (lm/W)	Lumen (lm)	Angle	PF>	CCT
Lens TPL-2R18-XTJ-φ70	L600*φ70	18	150	2700	24°/36°	0.9	3000K/4000K/6500K
TPL-4R36-XTJ-φ70	L1200*φ70	36	150	5400	24°/36°	0.9	3000K/4000K/6500K
TPL-5R48-XTJ-φ70	L1500*φ70	48	150	7200	24°/36°	0.9	3000K/4000K/6500K
Grid TPL-2R18-GX-φ70	L600*φ70	18	140	2520	60°	0.9	3000K/4000K/6500K
TPL-4R36-GX-φ70	L1200*φ70	36	140	5040	60°	0.9	3000K/4000K/6500K
TPL-5R48-GX-φ70	L1500*φ70	48	140	6720	60°	0.9	3000K/4000K/6500K

*Lumen and Wattage: Type value with ±10% tolerance

OPTIONAL



D-mini series

IP65 IK08 High Strength protection, effectively prevent corrosion and impact, multiple solutions for industry applications



SHINES EVENLY

Homogeneous light output through satin-finished, internal prismatic diffuser



80% RECYCLABLE

Housing and end caps made of shockproof polycarbonate (PC)



CAR PARK



UNDERGROUND PASSAGEWAY





WAREHOUSES


IP65



Integrated extrusion housing, better sealing effect

EASY

Can be opened and closed without tools using a turn lock fastener, cable screw fitting as standard

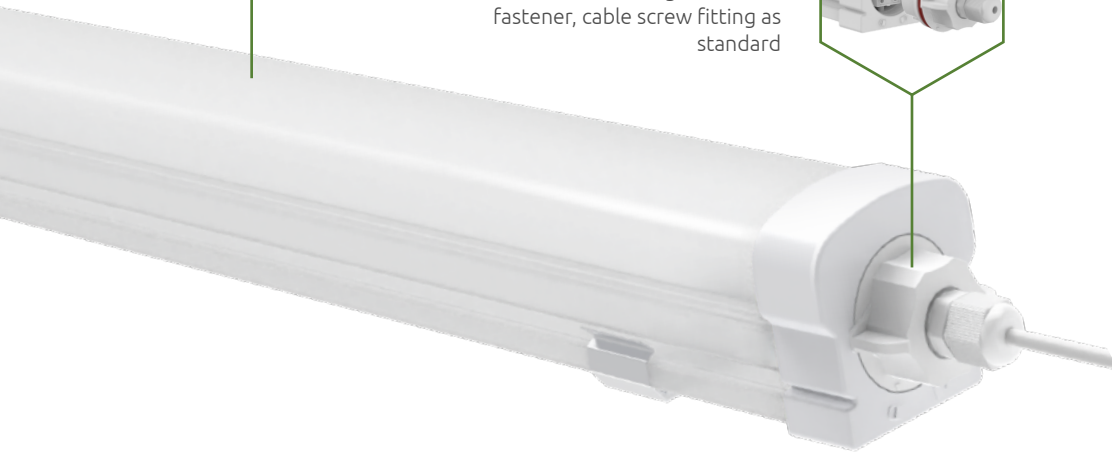
Application

factory workshops
sheltered outdoor areas
underground passageways
car parks
warehouses, etc

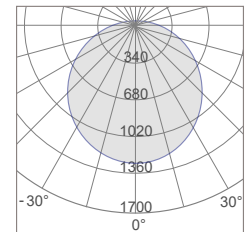

TPL-2D18M Photometric

Model No.	Size (mm)	Wattage (w)	Efficacy (lm/W)	Lumen (lm)	Angle	PF>	CCT
TPL-2D18M	L570xW60xH56	18	120	2160	120°	0.9	3000K/4000K/6500K
TPL-4D36M	L1170xW60xH56	36	120	4320	120°	0.9	3000K/4000K/6500K
TPL-5D48M	L1470xW60xH56	48	120	5760	120°	0.9	3000K/4000K/6500K

*Lumen and Wattage: Type value with ±10% tolerance



OPTIONAL


M series

Application
 shopping malls
 supermarkets
 offices
 schools
 hospitals
 metro stations, etc



Ambient lighting with wide angle

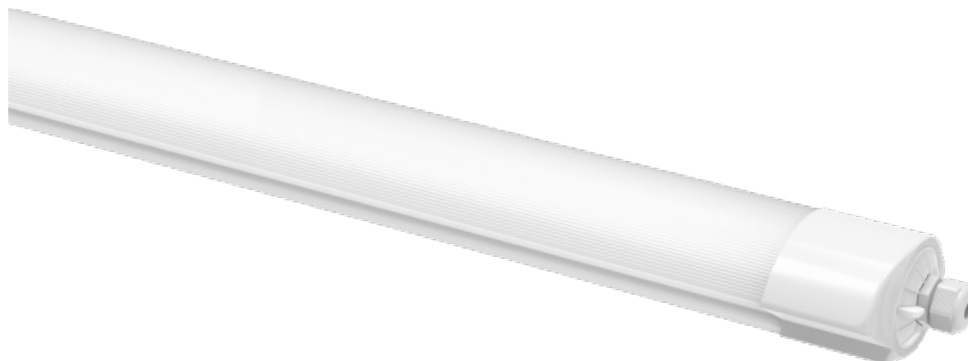

TPL-4M36 Photometric



AC
220-240V

IP
65

Ra
80

IK
10

5SDCM
LED

Model No.	Size (mm)	Wattage (W)	Efficacy (lm/W)	Lumen (lm)	Angle	PF>	CCT
TPL-2M18	L600*W90*H80	18	140	2520	150°	0.9	3000K/4000K/6500K
TPL-4M36	L1200*W90*H80	36	140	5040	150°	0.9	3000K/4000K/6500K
TPL-5M48	L1500*W90*H80	48	140	6720	150°	0.9	3000K/4000K/6500K



*Lumen and Wattage: Type value with ±10% tolerance

OPTIONAL


JS series

Application

- factory workshops
- office
- sheltered outdoor areas
- underground passage
- car parks
- warehouse
- food industry, etc

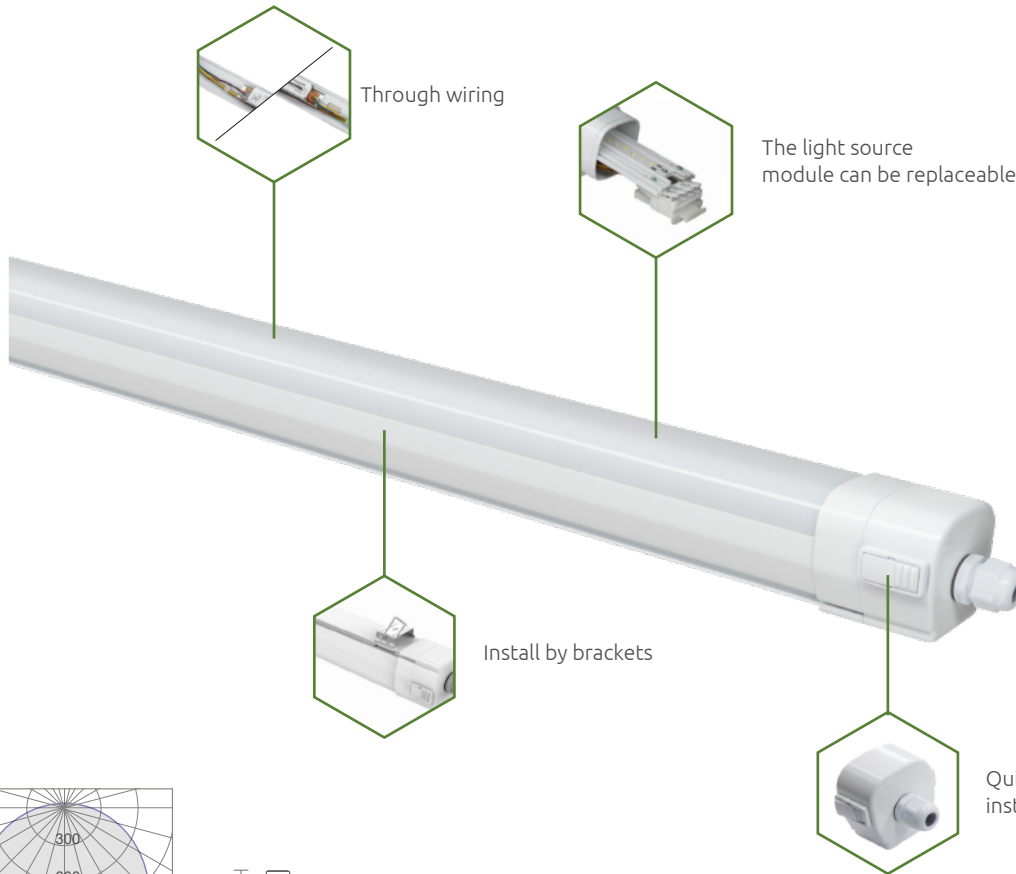

TPL-4J36S Photometric



Model No.	Size (mm)	Wattage (W)	Efficacy (lm/W)	Lumen (lm)	Angle	PF>	CCT
TPL-2J18S	L650*W73*H81	18	120	2160	120°	0.9	3000K/4000K/6500K
TPL-4J36S	L1230*W73*H81	36	120	4320	120°	0.9	3000K/4000K/6500K
TPL-5J48S	L1530*W73*H81	48	120	5760	120°	0.9	3000K/4000K/6500K

*Lumen and Wattage: Type value with ±10% tolerance


OPTIONAL




JA-E series

Application

clean rooms
hospitals
schools
supermarkets
car parks
offices
underground stations, etc



TPL-4J18A-E Photometric

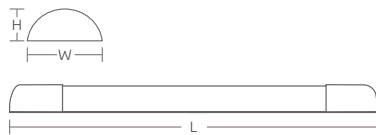


Model No.	Size (mm)	Wattage (W)	Efficacy (lm/W)	Lumen (lm)	Angle	PF>	CCT
TPL-2J9A-E	L600*W62*H27	9	120	1080	120°	0.5	3000K/4000K/6500K
TPL-4J18A-E	L1200*W62*H27	18	120	2160	120°	0.5	3000K/4000K/6500K
TPL-5J24A-E	L1500*W62*H27	24	120	2880	120°	0.5	3000K/4000K/6500K

*Lumen and Wattage: Type value with $\pm 10\%$ tolerance

JSA-E series

Application

- clean rooms
- hospitals
- schools
- supermarkets
- car parks
- offices
- underground stations, etc



TPL-4J18SA-E Photometric







AC
220-240V

IP
65

Ra
80

IK
08

SSDCM
LED


Model No.	Size (mm)	Wattage (W)	Efficacy (lm/W)	Lumen (lm)	Angle	PF>	CCT
TPL-2J9SA-E	L600*W53*H39	9	120	1080	120°	0.5	3000K/4000K/6500K
TPL-4J18SA-E	L1200*W53*H39	18	120	2160	120°	0.5	3000K/4000K/6500K
TPL-5J24SA-E	L1500*W53*H39	24	120	2880	120°	0.5	3000K/4000K/6500K

*Lumen and Wattage: Type value with ±10% tolerance


TJE series

Application

- factory workshops
- sheltered outdoor areas
- underground passageways
- car parks
- warehouses
- underground stations, etc



TPL-4T36JE Photometric

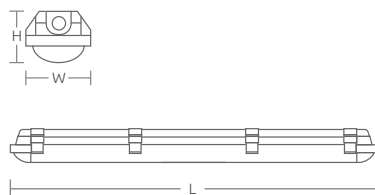

AC
220-240V

IP
65

Ra
80

IK
08

5SDCM
LED

Model No.	Size (mm)	Wattage (W)	Efficacy (lm/W)	Lumen (lm)	Angle	PF>	CCT
TPL-2T18JE	L675*W83*H80	18	120	2430	120°	0.9	3000K/4000K/6500K
TPL-4T18JE	L1225*W83*H80	18	120	2430	120°	0.9	3000K/4000K/6500K
TPL-4T36JE	L1225*W83*H80	36	120	5040	120°	0.9	3000K/4000K/6500K
TPL-5T24JE	L1525*W83*H80	24	120	3480	120°	0.9	3000K/4000K/6500K
TPL-5T42JE	L1525*W83*H80	42	120	6090	120°	0.9	3000K/4000K/6500K
TPL-5T55JE	L1525*W83*H80	55	120	7975	120°	0.9	3000K/4000K/6500K

*Lumen and Wattage: Type value with ±10% tolerance

OPTIONAL

Dimmable

DALI

Emergency


Microwave induction

Wattage/CCT selectable


TJF series

Application

- factory workshop
- sheltered outdoor areas
- underground passageways
- car parks
- warehouses
- metro stations, etc



TPL-4T32JF Photometric



AC
220-240V

IP
65

Ra
80

IK
08

5SDCM
LED

Model No.	Size (mm)	Wattage (w)	Efficacy (lm/w)	Lumen (lm)	Angle	PF>	CCT
TPL-2T10JF	L675*W65*H70	10	150	1500	120°	0.9	3000K/4000K/6500K
TPL-2T18JF	L675*W65*H70	18	150	2700	120°	0.9	3000K/4000K/6500K
TPL-4T26JF	L1280*W65*H70	26	150	3900	120°	0.9	3000K/4000K/6500K
TPL-4T32JF	L1280*W65*H70	32	150	4800	120°	0.9	3000K/4000K/6500K
TPL-5T46JF	L1585*W65*H70	46	150	6900	120°	0.9	3000K/4000K/6500K
TPL-5T58JF	L1585*W65*H70	58	150	8700	120°	0.9	3000K/4000K/6500K

*Lumen and Wattage: Type value with ±10% tolerance

OPTIONAL

Dimmable

DALI

Emergency

Microwave induction

Wattage/CCT selectable