



CLA series

Application

public area
balcony
building aisle, etc



CLA-18 Photometric



Die-casting aluminum material
more strong and durable

Model No.	Size (mm)	Wattage (w)	Efficacy (lm/W)	Lumen (lm)	Angle	PF>	CCT
CLA-18	Φ280×H80	18	100	1800	120°	0.9	3000K/4000K/6500K
CLA-30	Φ360×H80	30	100	3000	120°	0.9	3000K/4000K/6500K

*Lumen and Wattage: Type value with ±10% tolerance


OPTIONAL

Dimmable |
 DALI |
 Emergency |
 Microwave induction |
 Wattage/CCT selectable


CLB series

Application

public area
balcony
building aisle, etc



CLB18-B Photometric



Model No.	Size (mm)	Wattage (W)	Efficacy (lm/W)	Lume (lm)	Angle	PF>	CCT
CLB18	Φ300×H85	18	100	1800	120°	0.9	3000K/4000K/6500K

*Lumen and Wattage: Type value with ±10% tolerance

OPTIONAL




CLC series

Application
public area
balcony
building aisle, etc


PC diffuser has a mechanical resistance IK10




IP65 Dust and waterproof

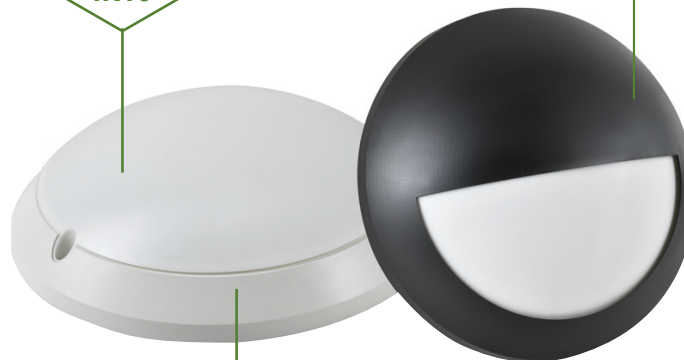

960°C Glow wire test



CLC-24 Photometric



Model No.	Size (mm)	Wattage (W)	Efficacy (lm/W)	Lumen (lm)	Angle	PF>	CCT
CLC2-24	Ø320*H90	24	120	2880	120°	0.9	3000K/4000K/6000K


*Lumen and Wattage: Type value with ±10% tolerance

OPTIONAL


Dimmable |
 DALI |
 Emergency |
 Microwave induction |
 Wattage/CCT selectable

CLD series

Application
public area
balcony
building aisle, etc



CLD-25 Photometric



			AC 220-240V	IP 65	Ra 80	IK 10	 960°C	5SDCM LED
--	--	--	-----------------------	-----------------	-----------------	-----------------	-----------	---------------------

Model No.	Size (mm)	Wattage (W)	Efficacy (lm/W)	Lumen (lm)	Angle	PF>	CCT
CLD-25	Ø300*H70	25	120	3000	120°	0.9	3000K/4000K/6500K

*Lumen and Wattage: Type value with ±10% tolerance


OPTIONAL

Dimmable	DALI	Emergency	Microwave induction	Wattage/CCT selectable
----------	------	-----------	---------------------	------------------------


HBA series

Application



factory workshops
warehouses
sheltered outdoor areas, etc

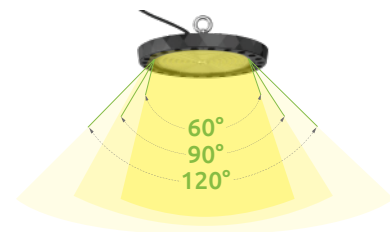

3 IN ONE Beam Angle



HBA150 Photometric

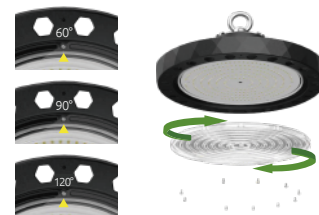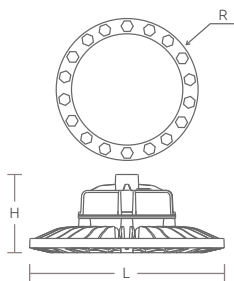

60°-90°-120°Selectable



Model No.	Size (mm)	Wattage (w)	Efficacy (lm/w)	Lumen (lm)	Angle	PF>	CCT
HBA-100	φ286*126	100	200	20000	60°/90°/120°	0.9	3000K/4000K/6500K
HBA-120	φ286*126	120	200	24000	60°/90°/120°	0.9	3000K/4000K/6500K
HBA-150	φ328*132	150	200	30000	60°/90°/120°	0.9	3000K/4000K/6500K
HBA-200	φ328*132	200	200	40000	60°/90°/120°	0.9	3000K/4000K/6500K

*Lumen and Wattage: Type value with ±10% tolerance

OPTIONAL



Dimmable



DALI



Emergency



Microwave induction




Wattage/CCT selectable



FLA series

Application

factory workshops
warehouses
sheltered outdoor areas, etc



FLA100 Photometric

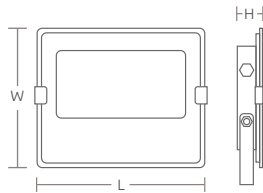

Model No.	Size (mm)	Wattage (w)	Efficacy (lm/W)	Lumen (lm)	Angle	PF>	CCT
FLA30	L172×W143×H31	30	160	16000	120°	0.9	3000K/4000K/6500K
FLA50	L208×W161×H31	50	160	24000	120°	0.9	3000K/4000K/6500K
FLA100	L293×W213×H33	100	160	32000	120°	0.9	3000K/4000K/6500K


*Lumen and Wattage: Type value with ±10% tolerance

OPTIONAL




SLA series

Application
streets



SLA120 Photometric

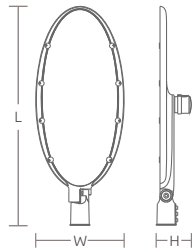





AC
220-240V

IP
65

Ra
80

IK
08

5SDCM
LED

Model No.	Size (mm)	Wattage (W)	Efficacy (lm/W)	Lumen (lm)	PF>	CCT
SLA100	L642*W269*H142	100	150	15000	0.9	3000K/4000K/6500K
SLA120	L677*W294*H142	120	150	18000	0.9	3000K/4000K/6500K
SLA150	L677*W294*H142	150	150	22500	0.9	3000K/4000K/6500K
SLA200	L802*W331*H142	200	150	30000	0.9	3000K/4000K/6500K
SLA240	L876*W354*H142	240	150	36000	0.9	3000K/4000K/6500K

*Lumen and Wattage: Type value with ±10% tolerance